

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/EP04/014737

International filing date: 21 December 2004 (21.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/544,342
Filing date: 17 February 2004 (17.02.2004)

Date of receipt at the International Bureau: 19 January 2005 (19.01.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

12 JAN 2005

PA 1265621



THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office


December 28, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/544,342

FILING DATE: February 17, 2004

**By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS**

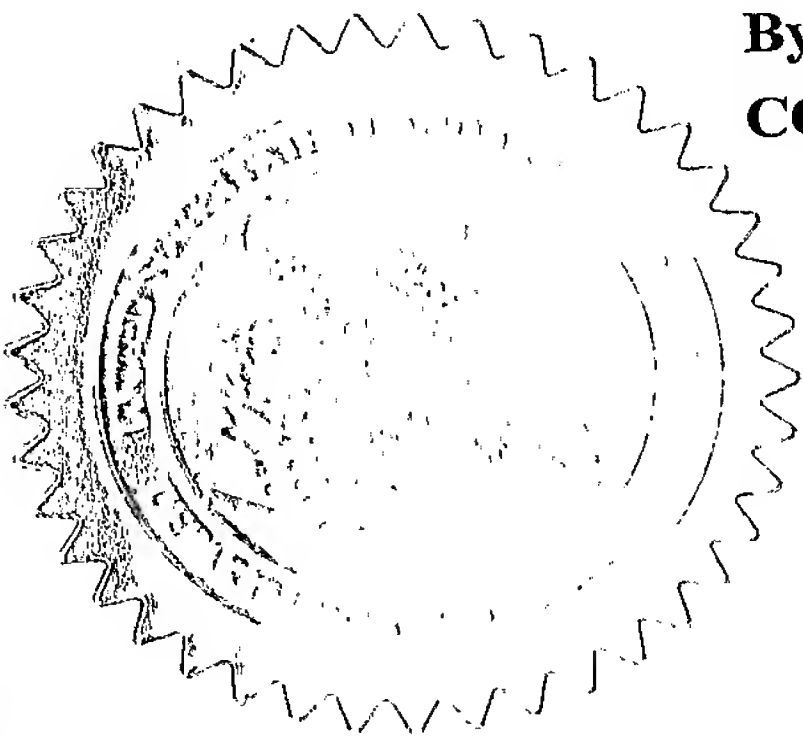

**M. SIAS
Certifying Officer**

13281 U.S. PTO

OLIFF & BERRIDGE, PLC
P.O. Box 19928
Alexandria, Virginia 22320
Telephone: (703) 836-6400
Facsimile: (703) 836-2787

Customer Number: 25944

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

Transmitted herewith for filing under 37 CFR §1.53(c) is the provisional patent application of

FIRST INVENTOR: Peter Marten VAN DER HORST

RESIDENCE: Arnhem, The Netherlands
(City and Either State or Foreign Country)

SECOND INVENTOR: _____

RESIDENCE: _____
(City and Either State or Foreign Country)


THIRD INVENTOR: _____

RESIDENCE: _____
(City and Either State or Foreign Country)

FOR (TITLE): PAPER COMPRISING QUATERNARY NITROGEN CONTAINING
CELLULOSE ETHER

- ☐ Formal drawings (Figs. _____; sheets _____) are attached.
☒ This patent application is assigned to Akzo Nobel N.V.
☐ The executed Assignment is filed herewith.
☐ Entitlement to small entity status is hereby asserted.
☒ Check No. 151041 in the amount of ☐ \$80.00 ☒ \$160.00 to cover the filing fee is attached.
Except as otherwise noted herein, the Commissioner is hereby authorized to charge payment of any additional filing fees required under 37 C.F.R. §1.16 or credit any overpayment to Deposit Account No. 15-0461. Two duplicate copies of this sheet are attached.

Respectfully submitted,

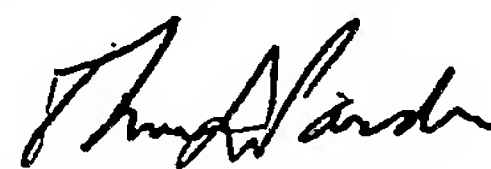
William P. Berridge
Registration No. 30,024

Thomas J. Pardini
Registration No. 30,411

WPB:TJP/amo

PROVISIONAL PATENT APPLICATION

ATTORNEY DOCKET NO.: 118690

DATE: February 17, 2004

MAIL STOP PROVISIONAL PATENT APPLICATION

PROVISIONAL PATENT APPLICATION
RULE §1.53(c)

22857 U.S. PTO
60/544342



021704

Paper comprising quaternary nitrogen containing cellulose ether

5 The invention relates to paper comprising cellulose ether. The invention further relates to the use of cellulose ether in papermaking processes.

Generally, papermaking processes comprise the steps of forming a paper web from an aqueous stock comprising cellulosic fibres, optionally fillers and additives, by feeding the stock to a forming wire and removing water therefrom..

10 The next steps are to further remove water by pressing and then by drying.

The term "paper" refers to sheet- or web-like products of the process including board, cardboard, and pulp sheets. Examples of paper are tissue paper and paper toweling, newsprint, grocery bags, fine papers, kraft linerboard, and folding boxboards. Paper has certain physical and chemical properties which, depending on its use, are known to the person skilled in the art. These properties can be varied by adding filler and/or additives to the stock. It is also possible to change the chemical and/or physical properties of paper by for example adding a paper coating on one or both sides of a (base) paper sheet, which is normally done in a size press or coater in the drying section of the paper machine or in a coater off-line of the paper machine. A wide range of additives can be added in the papermaking process. Apart from changing the chemical and physical properties of the paper, such additives may also serve to aid the papermaking process itself, as is known to the skilled person.

25 An example of an additive which has already been used in papermaking processes for many years is carboxymethyl cellulose (CMC). CMC is used as a dry-strength additive for improving the strength of the final paper product. In paper coatings CMC is used as a water-retention aid, so as to prevent premature dewatering of the paper coating after it has been applied to the paper but before the paper has been finally dried. Conventional CMC only has a limited functionality and due to its anionic character may decrease the efficiency of cationic additives in the stock. As a consequence, the use of CMC


30

in wet-end applications of the papermaking processes is limited, or it can only be used in combination with fixation agents such as alum.

It is therefore an object of the present invention to provide a modified cellulose ether for use in papermaking processes which does not have the above-mentioned problems.

This object is achieved with a paper comprising cellulose ether comprising a quaternary ammonium group.

10 Preferably, the quaternary ammonium group is of the formula:

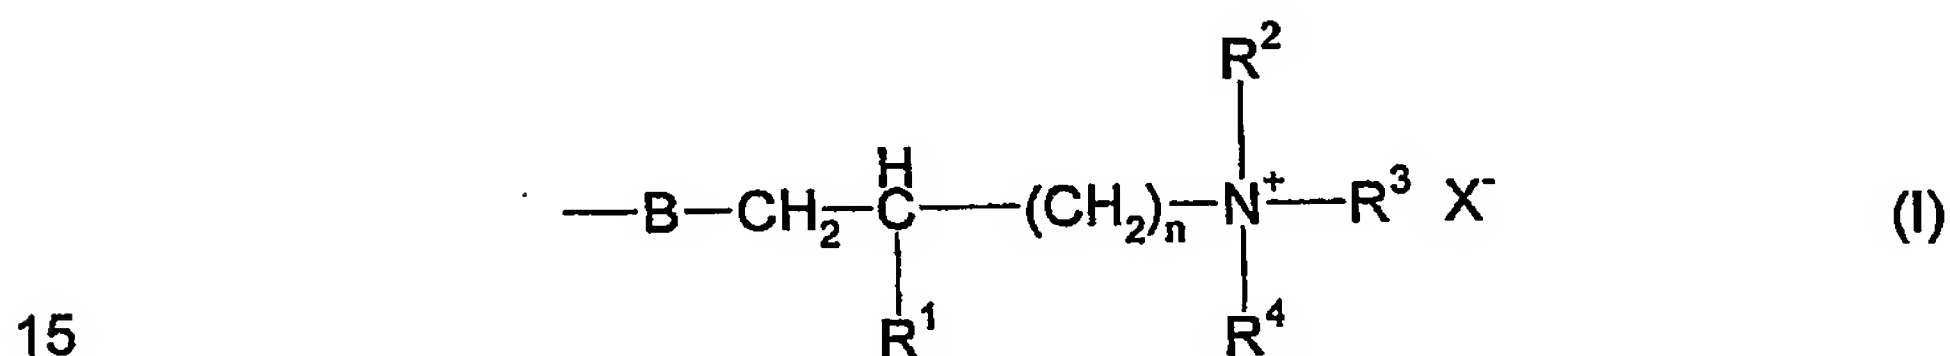

wherein R^1 is H or OH, R^2 , R^3 and R^4 are the same or different and are selected from $\text{C}_1\text{--C}_{24}$ alkyl, $\text{C}_6\text{--C}_{24}$ aryl, $\text{C}_7\text{--C}_{24}$ aralkyl, $\text{C}_7\text{--C}_{24}$ alkaryl, $\text{C}_3\text{--C}_{24}$ cycloalkyl, $\text{C}_2\text{--C}_{24}$ alkoxyalkyl, and $\text{C}_7\text{--C}_{24}$ alkoxyaryl groups, or R^2 , R^3 , R^4 , and the quaternary nitrogen atom form an aliphatic or aromatic heterocyclic ring; n is an integer of 1 to 4, B is attached to the cellulose backbone of the cellulose ether and selected from O, OC(O) , C(O)O , C(O)NH , NHC(O) , S, OSO_3 , OPO_3 , NH, or NR^5 , wherein R^5 is a $\text{C}_2\text{--C}_6$ acyl or a $\text{C}_1\text{--C}_4$ alkyl radical, and X^- is an anion. Preferably, B is O. It is further preferred that R^2 , R^3 , and R^4 are independently selected from the group consisting of methyl, ethyl, propyl, and benzyl.

By using a cellulose ether comprising a quaternary ammonium group according to the invention, paper can be manufactured with a lower dewatering time in the forming wire section compared to conventional CMC. This lower dewatering time enables a higher productivity of the papermaking machine, particularly in

those processes where the dewatering step is the flow- or speed-limiting step. Moreover, if a filler is added to the stock, more filler is retained in the water removal steps and consequently a higher filler content in the paper is possible. As the filler is generally cheaper than the cellulosic fibre, highly filled paper can
5 be produced in an economically more attractive way. Not being bound by theory, we believe that the higher affinity (or better adsorption) of the cellulose ether for the filler causes flocculation of fine (filler or fibre) particles present in the stock, resulting in a better retention of filler during the water removal steps.

10 The cellulose ether according to the invention may have a wider range of functions within the papermaking process and the resulting paper compared to conventionally used non-substituted CMC. It was found that the cellulose ether according to the invention adsorbs better than conventional CMC onto other compounds present in the stock, such as the cellulosic fibre or the filler
15 material, for example. Moreover, less of the cellulose ether having a quaternary ammonium group will remain non-adsorbed in the stock, which is advantageous for the process as, in particular, non-adsorbed cellulose ether will decrease the efficiency of cationic compounds in the stock. This will also result in a diminished build-up of cellulose ether in the white water (i.e. water which is
20 mechanically drained from the stock), which is advantageous, since white water is generally re-used in the papermaking process.

The chemical structure of the cellulose ether of the invention is similar to that of the cellulosic fibre. This will not only give the resulting paper a good dry strength, but will also lead to a better recyclability of the paper after use. The
25 paper to be recycled contains less non-cellulosic material and thus will have a better quality. Moreover, essentially all of the cellulose ether of the invention will remain adsorbed during repulping of the paper, giving the same advantages during the recycling process as during the initial papermaking process, as indicated above.

The cellulose ethers according to the invention generally have a degree of substitution (also referred to as DS) of quaternary ammonium groups of at least 0.01, preferably at least 0.02, and most preferably at least 0.05, and of at most 1.0, preferably at most 0.5, and most preferably at most 0.35. The cellulose ether may have only quaternary ammonium groups substituted onto the cellulose backbone. It may also be desirable to introduce other substituents onto the cellulose backbone or onto other reactive hydroxyl groups of the cellulose ether. Preferably, these substituents will be anionic or non-ionic. Examples of anionic groups are carboxyalkyl, sulphonate (e.g. sulphoethyl), phosphate, and phosphonate groups. Of the anionic groups carboxyalkyl and in particular carboxymethyl are most preferred. Generally, the average DS of carboxymethyl groups is at least 0.05, preferably at least 0.1, more preferably at least 0.15, and most preferably at least 0.2, and at most 1.2, preferably at most 1.0, more preferably at most 0.8, and most preferably at most 0.6.

Additionally or alternatively, nonionic groups can be introduced in order to improve the hydrophobic-hydrophilic balance of the cellulose ether or to improve its water solubility. Any nonionic group known to the skilled person can be incorporated. Examples can be gleaned from EP 0 991 668, which is incorporated herein by reference.

20

Depending on their functional use and the DS level of quaternary ammonium groups, cellulose ethers of the invention having a low DS of carboxymethyl groups, i.e. having fewer anionic groups, are preferred. Preferably, the net charge on the cellulose ether is at least -0.7, preferably at least -0.5, most preferably at least -0.4. The net charge is defined as the subtraction of the average DS of quaternary ammonium groups from the average DS of carboxymethyl groups.

25

Generally, the molecular weight of the cellulose ether of the invention is at least 20,000 Dalton, preferably at least 35,000 Dalton, and most preferably at least

50,000 Dalton, and at most 2,000,000 Dalton, preferably at most 1,200,000 Dalton, and most preferably at most 800,000 Dalton.

5 The quaternary ammonium-containing cellulose ether according to the invention can be prepared by any suitable method known to the person skilled in the art. Suitable methods can for example be found in US 6,281,172, which is incorporated herein by reference.

10 The cellulose ether of the invention can be added to the stock having varying functionality. For example, it may serve as a retention aid, a drainage or dewatering aid, a wet-web strength additive, a pitch-control agent, a sizing agent, a dry-strength additive, or as a wet-strength additive. The cellulose ether of the invention may also be used in paper coating, for example as a surface sizing agent, a dry-strength additive, a rheology additive, or as a water-retention
15 aid.

The cellulose ether according to the invention may be used alone or in combination with conventional additives. Examples of conventional additives can be found in *Kirk-Othmer Encyclopedia of Chemical Technology*, John Wiley & Sons, Inc. 1996 (online posting date of December 4, 2000) on "Papermaking
20 Additives" by M.A. Dulaney et al., and in "Paper Chemistry" by D. Eklund and T. Lindström, 1991, *DT Paper Science Publications*, Grankulla, Finland.

The invention is illustrated by the following examples.

25 EXPERIMENTAL

Apart from water and cellulosic fibres, hemicellulose, lignin and wood resins (released at pulping and bleaching) such as lipophilic extractives (fatty and resin acids, sterols, steryl esters, triglycerides), the stock comprises also fats,
30 terpenes, terpenoids, waxes, etc. Fillers are often added, and there are salts

present, as well as different chemical additives. If recycled fibre is used as a raw material, also compounds such as inks, glues, hot-melt plastics, latex, etc. are present.

- 5 In the paper machine wet-end, thick stock is mixed and usually diluted by process water such as white water to become thin stock. The thin stock is fed to the paper machine head box and onto the forming wire. The thin stock fibre suspension normally has a consistency of about 0.5 to 1.5% on dry material basis. Water is removed in the wire section to form a wet web at very
- 10 approximately 20% dry content. In the press section, water is removed further by pressing to a very approximate dry content of 40%. Finally, in the drying section, the paper web is dried to a final dry content of very approximately 90-100%.
- 15 The ash content of the paper can be measured on-line, but usually the analysis takes the form of pyrolysis of a paper sample made in the laboratory. Depending on which temperature is used and which type of filler is present, a conversion factor is applied when calculating the filler content. By filler content is meant the pyrolysis residue weight as a percentage of the total weight of the
- 20 paper sample (i.e. the ash content), times a conversion factor.

Comparative Example

- Gabrosa PA 347 (molecular weight 150,000 Dalton) ex Akzo Nobel (a CMC which is not in accordance with the invention) having a DS of carboxymethyl
- 25 groups of 0.5 is added to the stock in a concentration of 2 kg/t stock. The thus obtained stock was dewatered according to the above method in 6.8 seconds. The filler content of the obtained paper was 34.9 wt%, calculated on total weight of the paper.

Example 1

To the stock a CMC having a DS of carboxymethyl groups of 0.4 and a DS of quaternary ammonium groups of 0.17 was added. This CMC has a molecular weight of about 150,000 Dalton. Dewatering proceeded in 6.5 seconds and the
5 filler content was found to be 35.3 wt%. Compared to conventional CMC, the CMC of this Example showed a shorter dewatering time and a higher filler content.

Example 2


10 To the stock a CMC having a DS of carboxymethyl groups of 0.4 and a DS of quaternary ammonium groups of 0.17 was added. This CMC has a molecular weight of 800,000 Dalton. Dewatering proceeded in 6.2 seconds and the filler content was found to be 35.8 wt%. Compared to non-substituted CMC, the CMC of this Example showed a shorter dewatering time and a higher filler
15 content.

CLAIMS

1. A paper comprising cellulose ether wherein the cellulose ether comprises a quaternary ammonium group.

5

2. The paper according to claim 1 wherein the quaternary ammonium group is represented by the formula:

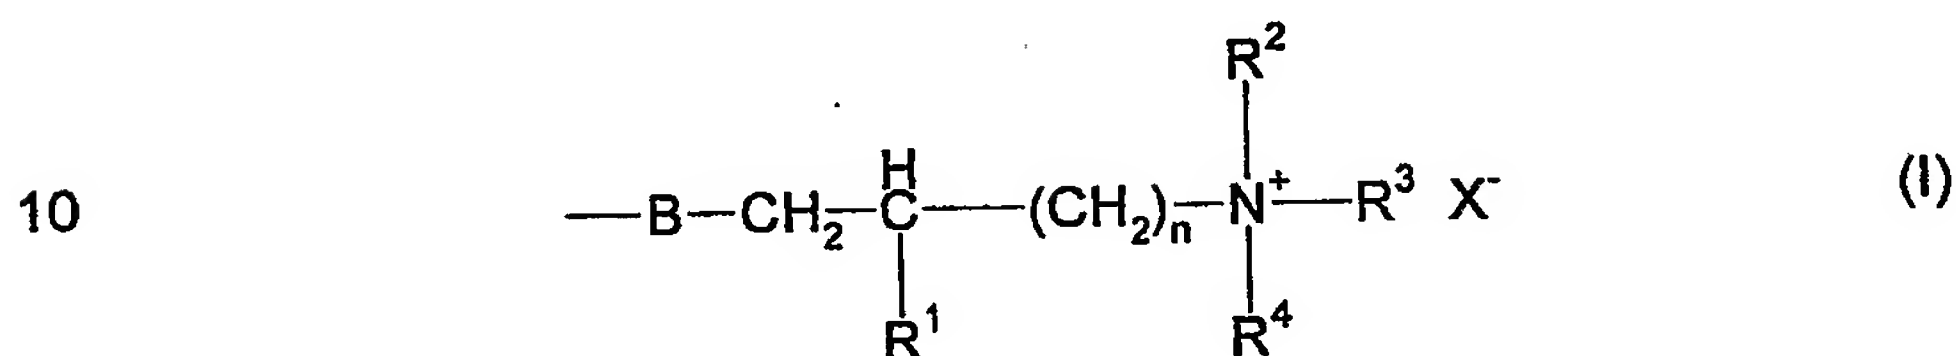

15 wherein R¹ is H or OH, R², R³, and R⁴ are the same or different and are selected from C₁-C₂₄ alkyl, C₆-C₂₄ aryl, C₇-C₂₄ aralkyl, C₇-C₂₄ alkaryl, C₃-C₂₄ cycloalkyl, C₂-C₂₄ alkoxyalkyl, and C₇-C₂₄ alkoxyaryl groups, or R², R³, R⁴, and the quaternary nitrogen atom form an aliphatic or aromatic heterocyclic ring; n is an integer of 1 to 4, B is attached to the backbone of the cellulose ether and selected from O, OC(O), C(O)O, C(O)-NH, NHC(O), S, OSO₃, OPO₃, NH, or NR⁵, wherein R⁵ is a C₂-C₆ acyl or a C₁-C₄ alkyl radical, and X⁻ is an anion.

20

3. The paper according to claim 1 or 2 wherein the cellulose ether has a DS of quaternary ammonium groups of between 0.01 and 0.7.

25 4. The paper according to any one of the preceding claims wherein the cellulose ether further has a DS of carboxymethyl groups of between 0.05 and 1.0.

30 5. A paper coating comprising cellulose ether wherein the cellulose ether comprises a quaternary ammonium group.

ACM 3029 PDEP

9

6. Use of cellulose ether comprising a quaternary ammonium group in papermaking processes.

ACM 3029 PDEP

10

ABSTRACT

The invention relates to paper comprising cellulose ether having a quaternary ammonium group. It also relates to the use of cellulose ether having a
5 quaternary ammonium group in papermaking processes.